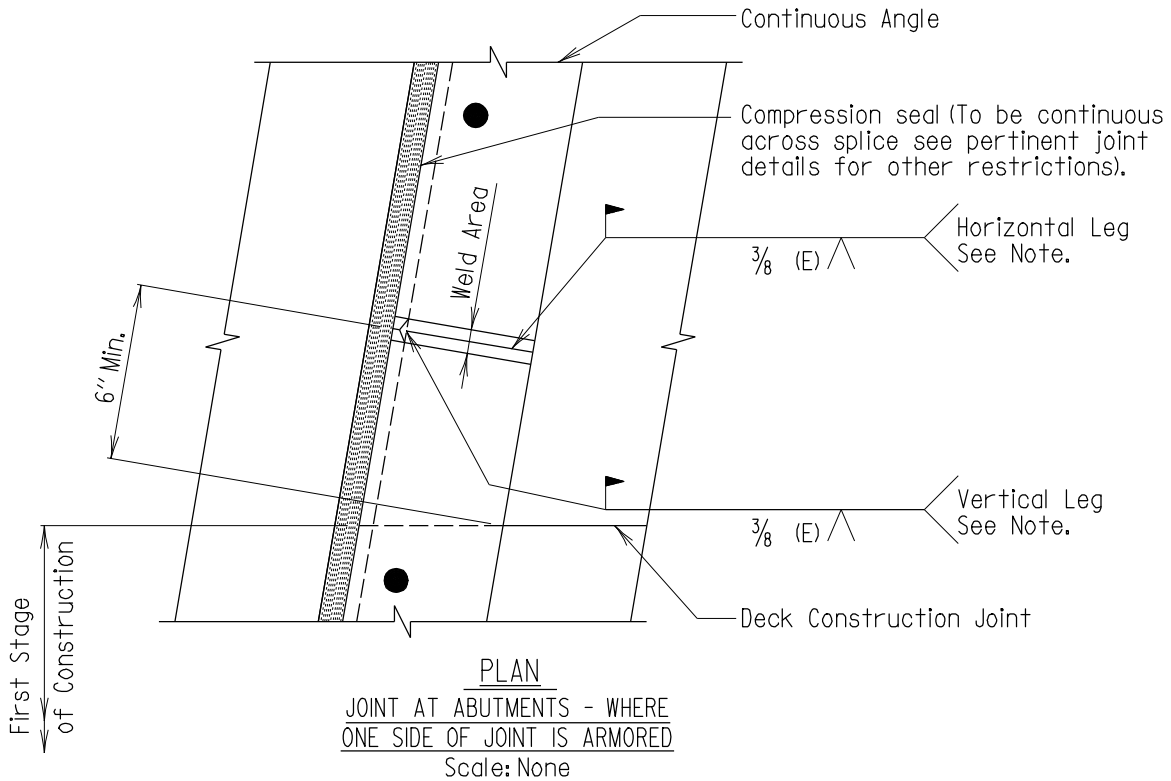

PLAN

JOINT AT ABUTMENTS - WHERE ONE SIDE OF JOINT IS ARMORED

Scale: None

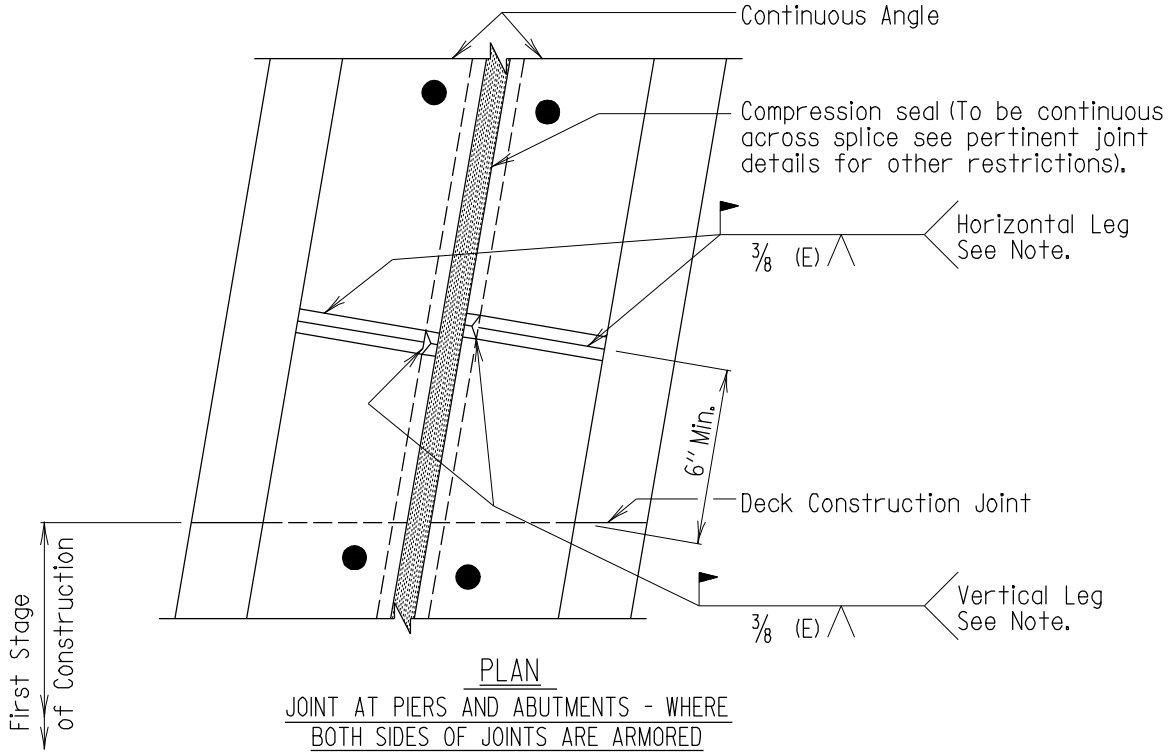

PLAN

JOINT AT PIERS AND ABUTMENTS - WHERE BOTH SIDES OF JOINTS ARE ARMORED

Scale: None

Notes:
The minimum effective throat (E) shall be determined by the angle thickness as follows:
Min. E = 3/16" for thicknesses over 1/4" to 1/2" incl.
Min. E = 1/4" for thicknesses over 1/2" to 3/4" incl.

APPROVAL	
R.S. Freedman DIRECTOR OFFICE OF BRIDGE DEVEL.	
DATE: 7/28/80	
REVISIONS	
SHA	FHWA
9-9-82	6-27-83
6-28-84	11-8-84
4-10-86	6-8-90
9-3-86	6-8-90

FHWA APPROVAL
DATE: 10-3-80

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF BRIDGE DEVELOPMENT

ROADWAY JOINT SPLICES FOR SEQUENTIAL CONSTRUCTION

STANDARD NO. BR-SS(7.09)-80-113 SHEET 1 OF 1

SUPER-ROADWAY JOINTS